




# SoFTILE TRANSITIONING TO LOOSE FILL SURFACE

P.O. BOX 239, 4393 DISCOVERY LINE  
 PETROLIA, ONTARIO  
 N0N 1R0  
 PHONE: (800) 263-2363  
 PHONE: (519) 882-8799  
 FAX: (519) 882-2697  
 EMAIL: allinfo@sosurfaces.com

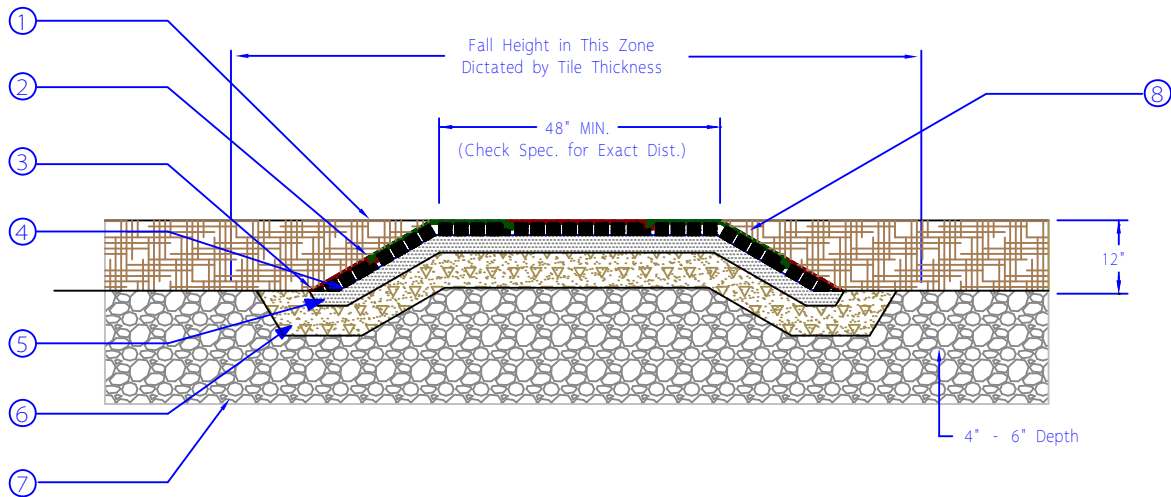

## LEGEND:

- ① Engineered Wood Fiber or Approved Alternate Loose Fill Surface.
- ② 1/2" (12mm) Diameter Continuous Bead of SofTILE Adhesive at Each KrosLOCK Joint.
- ③ SofTILE (See Specifications for Thickness and Color).
- ④ Apply SofTILE Adhesive to Entire Base Surface Prior to Installing Tiles With a 3/8 Notched Trowel (on sloped area only).
- ⑤ 3.00" (76mm) Concrete Base. Concrete to Have Minimum 2000 PSI (13.8 Mpa) Compressive Strength After 21 Days.
- ⑥ Compacted Granular B Type I (OPS).
- ⑦ Compacted Subgrade.
- ⑧ Tiles to be Secured with Weight at Transition Until Adhesive Cures - Min. 24Hrs.

THICKNESS	CRITICAL FALL HEIGHT (FT)		REVISIONS				
	WITH 10 YEAR PERFORMANCE WARRANTY PLUS SERIES	WITH 10 YEAR PERFORMANCE WARRANTY PREMIUM SERIES (EPDM)	REV	DESCRIPTION	DATE	APPR	
			0	ORIGINAL ISSUE	03/13/03		
2.00"	4.0	4.0	1	TITLE REVISED	12/18/03		
3.00"	5.0	5.0	2	UPDATED	10/20/04		
3.25"	6.0	6.0	3	UPDATED	06/03/09		
3.50"	7.0	7.0					
4.00"	8.0	8.0					
4.25"	10.0	10.0					
			SIZE	FSCM NO.	DWG NO.	REV	
			A		2000 - 001	3	
FILE NAME	A0001SK1	PREPARED BY	B.GOSS	SCALE	NTS	SHEET	SK1