


**C-LINE FITTING**

Aluminum alloy (GM70B) manufactured and tested in accordance with ASTM Standards:

- ASTM B 179-68
- ASTM B 108-68
- ASTM E 10-66
- ASTM E 8-66

Available for panel or pipe applications.

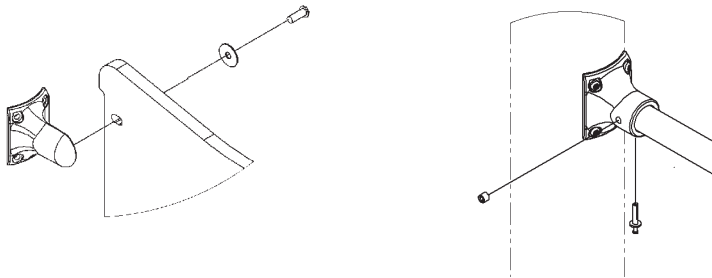

Powder coat finish


- TGIC Polyester
- Electrostatic application
- Baked-on @ 400 degrees
- Lead free
- High gloss
- No peel / No flake finish
- Rust and chip resistant
- Resistant to salt spray (ASTM B117)
- Resistant to humidity (ASTM D2247)
- Direct/Indirect impact 120 in. pounds (ASTM D2794)
- Good to excellent resistance to most solvents, oils, acids and alkalies
- 13 color options

Limited lifetime warranty

Mounts securely to vertical post with adhesive gasket and four 1/4"x1" TORX self tapping screws with patch.


Sealing gasket

- Neoprene rubber
- 60 +/-5 Durometer hardness
- Double-sided adhesive

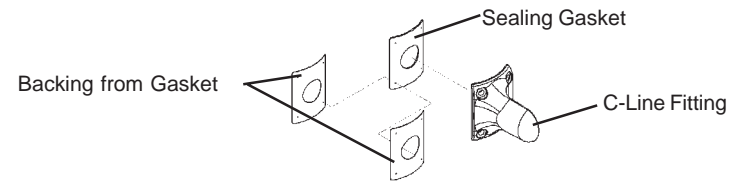

Self-Tapping screws

- Type 304 (18-8) Stainless steel
- 84 ksi tensile strength
- 42 ksi yield strength
- Security patch to insure screw locks into vertical pipe
- Tamper resistant
- Special tool required for install
- Limited lifetime warranty

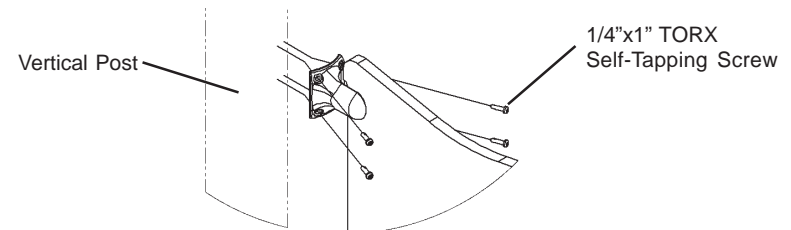

Each C-Line fitting has been tested in our laboratory to hold over 2,000 pounds without failure.

